



Vortron's **AIRPOWER®** line of compact centrifugal blowers promises to raise the bar for industrial blower performance. Flow and pressure not attainable with competitive single stage products are now easily achieved. Three models are available: the flagship Z40e, the ultra efficient X40, and the scrappy J70. Each are specialists in their own right and are aerodynamically optimized for meeting specific flow and pressure requirements. All are clean-sheet designs developed from the ground up to deliver best performance, best durability, and best efficiency available anywhere today. With peak isentropic efficiencies reaching 82%, no other compact blower product even comes close.

Technology A closer look reveals **AIRPOWER**® means business. All products are based upon modern centrifugal compressor design principles with aerodynamic performance vastly superior to common, but outdated technology. Manufacturing and quality are held to aerospace turbomachinery standards, enabling **AIRPOWER**® to consistently meet design performance and efficiency levels well beyond the competition. The elusive 100 in-H2O at 1,000 SCFM is not only **easily attained**, it's achieved at 80% efficiency!

AIRPOWER

Development and Test Based upon

Vortech's 22-plus years of industry-leading automotive supercharger design, development, and manufacturing, Vortron incorporates the same engineering and development excellence in the **AIRPOWER**[®] lineup. A fundamental

difference that sets Vortron and **AIRPOWER**® apart is exhaustive testing. Years of analytical and empirical development were devoted to optimizing these designs, with numerous iterations tested and evaluated against stiff criteria. All accomplished with Vortron's gas compressor test stand, developed and operated in accordance with SAE Standard J-1723 – *a first and only in the industry!* As such,


Vortron is the only manufacturer which publishes compressor maps, derived from actual test data, for all **AIRPOWER**® products.




Inside AIRPOWER™

It's immediately apparent; **AIRPOWER®** is different by design. Not only does the **AIRPOWER®** compact compressor outperform the competition, a variety of standard features are incorporated which clearly establish an exceptional product.

SPINDLE ASSEMBLY - Take note, AIRPOWER® spindles are entirely different from what you're used to seeing. To begin with, the spindle housing is not exposed to the internal hot compressed air stream, common with competitive designs. Instead, **AIRPOWER®** incorporates its exclusive Fresh-AireTM (patent applied for) cooling feature, which supplies an uncompressed cool air stream to the bearing housing. This limits temperature rise in the critical bearing and seal elements. Limiting temperature rise in the bearing system has a significant impact on longevity. In general, a 20° increase in running temperature will reduce grease life by a factor of one-half. **AIRPOWER®**'s higher compressor efficiency limits temperature rise even more. The bearing system uses precision (ABEC 9) angular contact (A/C) bearings, with a duplex pair positioned outboard to support the belt load. A/C bearings are better suited for high-speed use and generate less friction, hence less heat and lower temperature rise than competitive deep groove ball bearing designs. The result: greater margin for speed and load capacity, meaning enhanced durability and extended life.

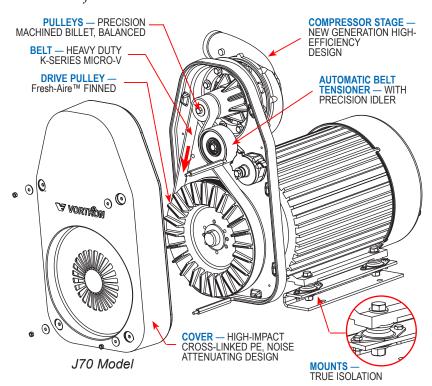

AIRPOWER® — Standard Features

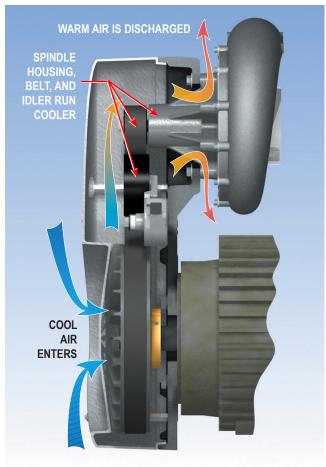

The Fresh-Aire™ System (Patent Applied For)


TENSIONING AND BELT LIFE - Automatic tensioning systems are now seen as standard, but **AIRPOWER®** incorporates a precision machined idler system with dual (proprietary) bearings for extended life. The entire drive system is fully enclosed and cooled by the Fresh-AireTM system. Reasoning is simple: in general, an 18° temperature rise in the belt can also cut belt life in half! By carrying away heat, temperature rise in the belt and idler system is managed; again, reliability and life are maximized. Customers place a high priority on belt and idler performance – Vortron has engineered a solution!

PRECISION DRIVE SYSTEM COMPONENTS Designed and manufactured entirely by
Vortron, our precision drive components
add another level of quality and sophistication to the *AIRPOWER®* product line.
Blower pulleys are machined from billet
stainless steel and balanced to ISO G4 tolerances. Also part of the Fresh-AireTM sys-

tem, the unique drive pulley with integral cooling fins is cast aluminum, hard anodized, and balanced. This system makes sense as the large aluminum pulley offers additional capacity to conduct and carry away heat from the drive belt.

CAST MOUNTING PLATE AND COVER - Our customers continue to press for not only enhanced performance and greater reliability, but also quieter operation - a tough bill because making pressure quietly is not easy. But, Vortron ingenuity does it again. The rugged cast mounting plate and cover offer not only exceptional fit and finish to the product, but also effectively manage noise sources.

ADVANCED COMPRESSOR STAGE - Here's where the rubber meets the road! AIRPOWER® blower/ compressor stages are highly evolved, thoroughly tested designs, originating from years of experience and thousands of production supercharger units. A simple visual examination clearly shows the difference. All AIRPOWER® compressors incorporate sophisticated impeller designs, coupled to either a channel or vaneless diffuser with a progressive scroll, or volute exit stage. Impellers incorporate advanced aerodynamic features such as optimized inducer blading, splitters, and in some cases, exit rake and backsweep... all depending on the particular pressure/flow objectives. Rather than a simple change of blower speed to effect different "models"

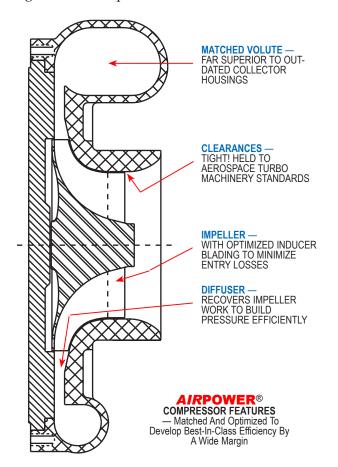



each **AIRPOWER®** model is optimized aerodynamically so that the best performance is attained for your specific application.

In order to effectively take advantage of impeller work, flow must be efficiently diffused so that pressure can be generated with minimal losses. Exclusive to **AIRPOWER®**, diffusers are incorporated, each optimally matched to the impeller flow physics, with many iterations tested and verified until maximum efficiency is achieved. Finally, a matched volute effectively collects and diffuses further, resulting in additional pressure rise.

The result? Isentropic efficiencies as high as 80%! In fact, all **AIRPOWER**® compressors achieve at least 76% peak efficiency, with better than 70% efficiency over a majority of design flow range (surge to choke). Note that these same efficiency levels are achieved at discharge pressures which clearly eclipse the competition for a low-cost, single-stage machine. The **AIRPOWER**® Z40e for example, is capable of 170" H2O pressure at 1,200 SCFM, and 78% efficiency! Looking at it another way, a 20HP Z40e easily delivers the elusive 100" H2O at 1,000 SCFM.

IT ALL ADDS UP To:

More performance; enhanced durability; reduced energy consumption and reduced annual operating costs. In other words, *improved bottom line*.

The Players



Vortron's high efficiency **AIRPOWER®** model for intermediate flow applications at moderate pressure. At 79% peak efficiency, the X40 outclasses all others by a wide margin!

The best choice where high duty or extended "on time" impresses the need for energy conservation. Applications include high-performance air knives, blow-off, or de-watering nozzles used in compact, high-throughput process cleaners; air evacuation, aeration, fluidized beds; air or non-corrosive process gas.



Where flows of 600 to 1600 SCFM at pressures at or above 70 in-H2O are required, the


AIRPOWER® Z40 surpasses all others! This model exhibits an extraor-

dinarily flat flow/pressure charactersistic that is notably absent of the typical "drooping" curve. In some cases, this enables a single Z40 to do the work of multiple units. 80% peak efficiency is attained. Ideal for ultra high-performance air knives/nozzle arrays for high volume blow-off applications. Also, shallow vacuum, air evacuation, aeration, large fluidized beds; air or non-corrosive process gas.



Z80 is the newest addition to the **AIRPOWER®** line-up. Developed for extreme flow and pressure applications where elevated pneumatic power demands require it. Flows to 2,000 CFM

and beyond, with pressures up to 5 psi are attained in a single compact package. Power ratings up to 50 HP available.

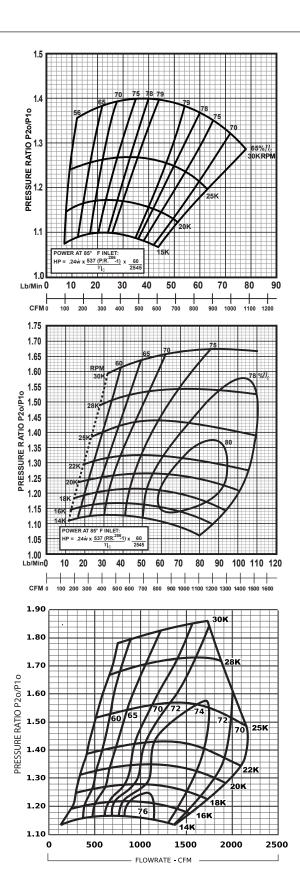



805.240.2516

1650 Pacific Avenue, Channel Islands CA 93033-9901 • Fax: 805.247-0669 **www.vortron.com**